




Elmo Rietschle

G-BH 1 N Data sheet 2BH7 420


Side channel blower with NEMA Premium motor



Performance curves

Vacuum operation (acfm)

Pressure operation (scfm)

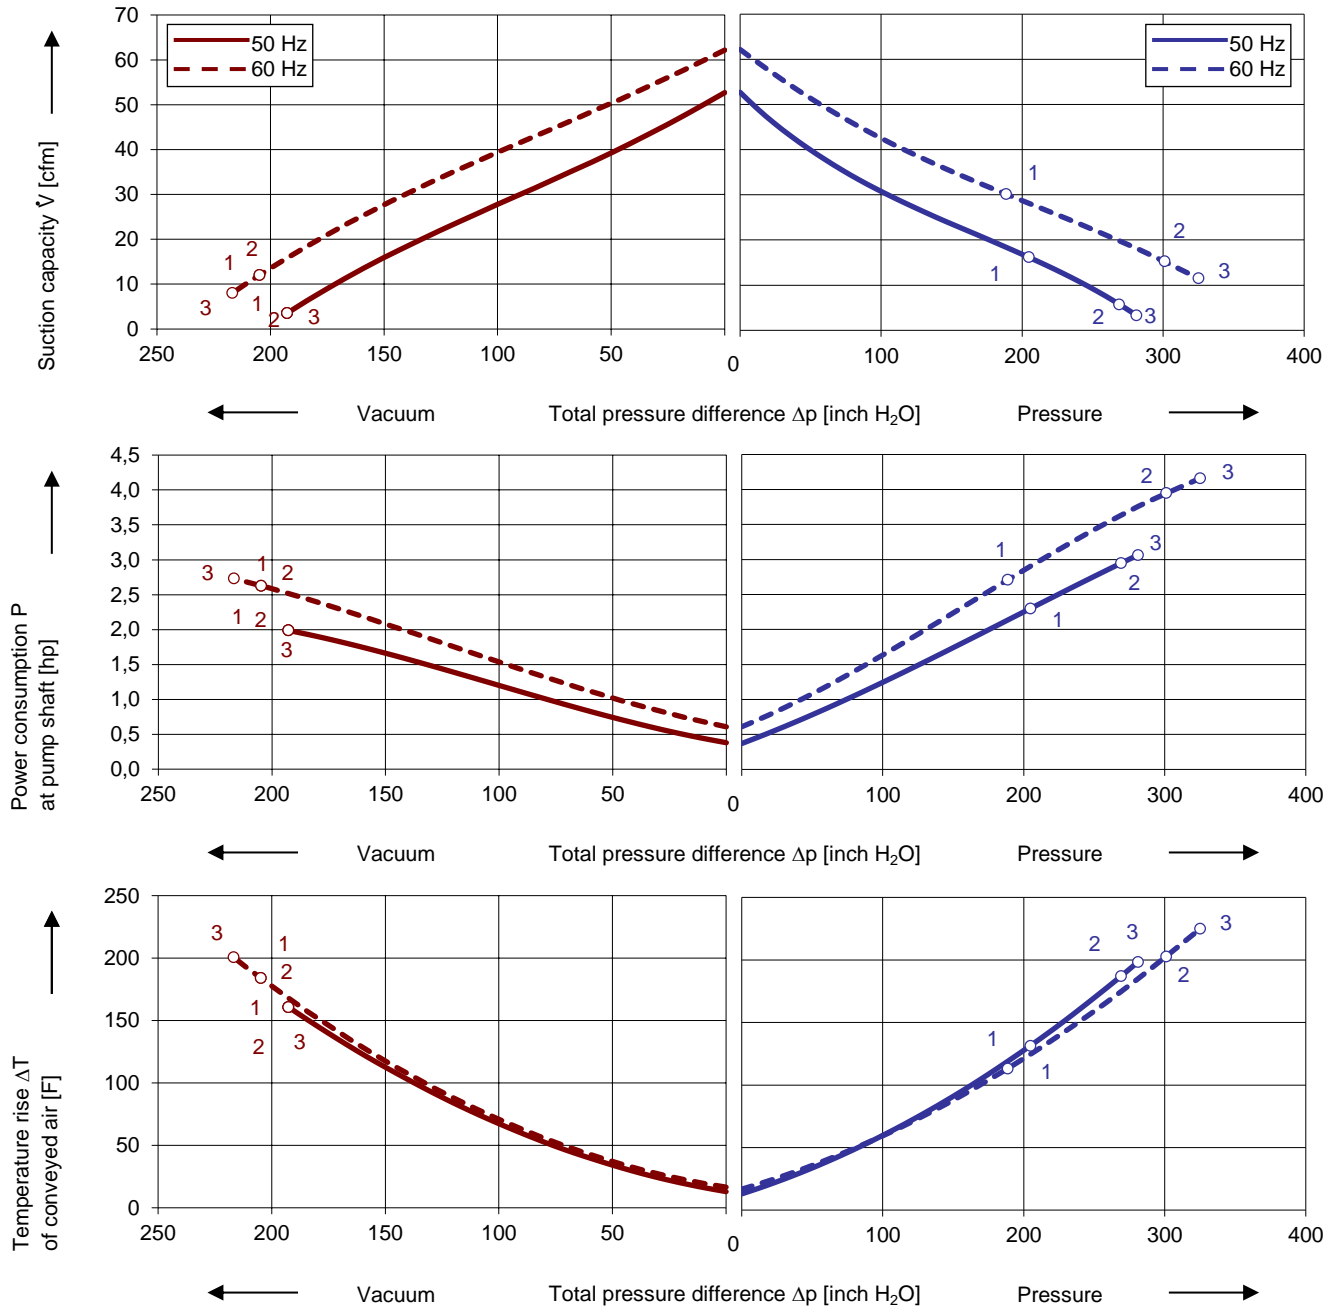

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 29.92 inch Hg with a tolerance of $\pm 10\%$. The total Suction capacity relates to inlet conditions. Pressure capacity relates to atmospheric conditions. For other conditions please contact Elmo Rietschle.

Every G-BH blower can be used either for vacuum or pressure in continuous operation over the total performance curve range. The standard motors have a protection category of IP 55 and insulation class F. These blowers are UL and CSA approved.

Selection and ordering data

Type										
No.	Frequency Hz	Rated			Max. differential ²⁾ pressure		sound press. level ³⁾ dB(A)	Efficiency class ⁴⁾	Weight approx. lbs	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure				
		V	A	hp	inch H ₂ O					
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL (certificate number E489378)										
1	50	190-210 Δ	6,9 Δ	2,3	-193	205	61	IE3	84	2BH7420-0AK21-1
	60	190-210 YY / 380-420 Y	7,8 YY / 3,9 Y	2,7	-205	189	66	IE3		
	60	200 YY	7,8 YY	2,7	-205	189	66	NP		
2	50	190-210 Δ	9,9 Δ	3,4	-193	269	61	IE3	95	2BH7420-0AK31-1
	60	190-210 YY / 380-420 Y	12,0 YY / 6,0 Y	4,0	-205	301	66	IE3		
	60	200 YY	12,0 YY	4,0	-205	301	66	NP		
3	50	190-210 Δ	13,3 Δ	4,6	-201	333	61	IE3	104	2BH7420-0AK61-1
	60	190-210 YY / 380-420 Y	15,2 YY / 7,6 Y	5,4	-225	381	66	IE3		
	60	200 YY	15,2 YY	5,4	-225	381	66	NP		
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL (certificate number E489378)										
1	50	220-240 Δ / 380-420 Y	6,0 Δ / 3,45 Y	2,3	-201	185	61	IE3	84	2BH7420-0AK26-1
	60	220-240 YY / 440-480 Y	6,8 YY / 3,4 Y	2,7	-197	165	66	IE3		
	60	230 YY / 460 Y	6,8 YY / 3,4 Y	2,7	-197	165	66	NP		
2	50	220-240 Δ / 380-420 Y	8,6 Δ / 5,0 Y	3,4	-193	269	61	IE3	95	2BH7420-0AK36-1
	60	220-240 YY / 440-480 Y	10,4 YY / 5,2 Y	4,0	-205	301	66	IE3		
	60	230 YY / 460 Y	10,4 YY / 5,2 Y	4,0	-205	301	66	NP		
3	50	220-240 Δ / 380-420 Y	11,6 Δ / 6,7 Y	4,6	-201	333	61	IE3	104	2BH7420-0AK66-1
	60	220-240 YY / 440-480 Y	13,2 YY / 6,6 Y	5,4	-225	381	66	IE3		
	60	230 YY / 460 Y	13,2 YY / 6,6 Y	5,4	-225	381	66	NP		
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL (certificate number E489378)										
1	50	500 Y	2,76 Y	2,3	-193	205	61	IE3	84	2BH7420-0AQ23-1
	60	575 Y	2,72 Y	2,7	-205	189	66	NP		
2	50	500 Y	4,0 Y	3,4	-193	269	61	IE3	95	2BH7420-0AQ33-1
	60	575 Y	4,1 Y	4,0	-205	301	66	NP		
3	50	500 Y	5,4 Y	4,6	-201	333	61	IE3	104	2BH7420-0AQ63-1
	60	575 Y	5,3 Y	5,4	-225	381	66	NP		
IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL (certificate number E489378)										
1	50	380-420 Δ / 660-725 Y	3,45 Δ / 2,00 Y	2,3	-193	205	61	IE3	84	2BH7420-0AQ27-1
	60	440-480 Δ	3,4 Δ	2,7	-205	189	66	IE3		
	60	460 Δ	3,4 Δ	2,7	-205	189	66	NP		
2	50	380-420 Δ / 660-725 Y	5,0 Δ / 2,90 Y	3,4	-193	269	61	IE3	95	2BH7420-0AQ37-1
	60	440-480 Δ	5,2 Δ	4,0	-205	301	66	IE3		
	60	460 Δ	5,2 Δ	4,0	-205	301	66	NP		
3	50	380-420 Δ / 660-725 Y	6,7 Δ / 3,85 Y	4,6	-201	333	61	IE3	104	2BH7420-0AQ67-1
	60	440-480 Δ	6,6 Δ	5,4	-225	381	66	IE3		
	60	460 Δ	6,6 Δ	5,4	-225	381	66	NP		

2) Relief valves available for limiting differential pressure.

3) Surface sound pressure levels are according to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).

4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.

All G-BH blowers conform to the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages

Voltage range		Efficiency ⁴⁾	C _{RU}	60 Hz	
50 Hz	60Hz			2BH1...-1.	<input type="checkbox"/>
3~					
200 V Δ	200 V YY / 230 V Δ / 400 V Y		•	<input type="checkbox"/>	<input type="checkbox"/>
190-210 V Δ	190-210 V YY / 220-240 V Δ / 380-420 V Y	IE3	•	<input type="checkbox"/>	<input type="checkbox"/>
200 V YY / 230 V Δ / 400 V Y	230 V YY / 460 V Y		•	<input type="checkbox"/>	<input type="checkbox"/>
190-210 V YY / 220-240 V Δ / 380-420 V Y	220-240 V YY / 440-480 V Y	IE3	•	<input type="checkbox"/>	<input type="checkbox"/>
475-525 V Y	550-600 V Y		•	<input type="checkbox"/>	<input type="checkbox"/>
475-525 V Δ	550-600 V Δ		•	<input type="checkbox"/>	<input type="checkbox"/>
400 V Δ / 690 V Y	460 V Δ		•	<input type="checkbox"/>	<input type="checkbox"/>

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown.

Elmo Rietschle is a brand of Gardner Denver

**Gardner
Denver**

Your Ultimate Source for Vacuum and Pressure

Gardner Denver Deutschland GmbH

Industriestraße 26
97616 Bad Neustadt - Germany
Tel.: +49 9771 6888-0
Fax: +49 9771 6888-4000
www.elmorietschle.com

Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
Tel: 866-249-2275
Fax: 217-221-8780
www.elmorietschle.com