



# G-BH7

## Data sheet 2BH7 610-0A

Side channel blower

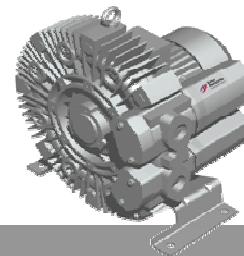

### Performance curves

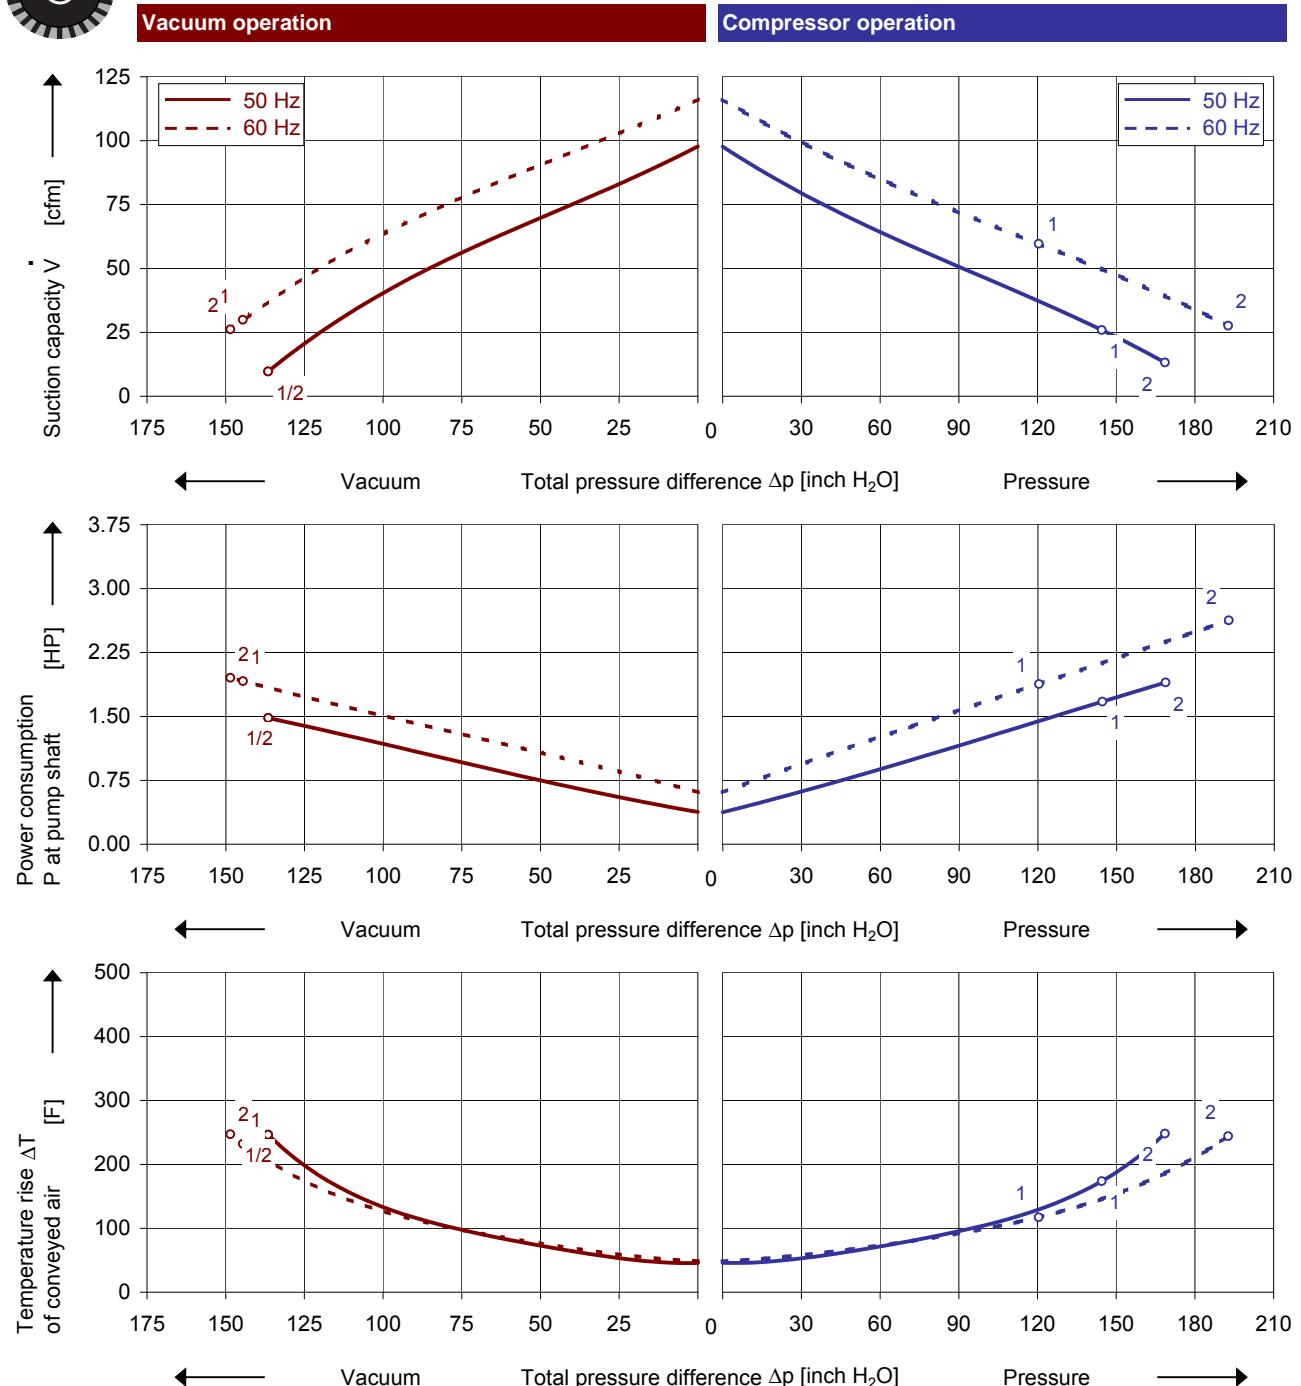

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 29.91 inch Hg with a tolerance of  $\pm 10\%$ . The total pressure differences are valid for suction and ambient temperature up to 77 F. Suction capacity relates to suction conditions. Pressure capacity relates to atmospheric conditions. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

## Selection and ordering data

### Type 2BH7 610-0A

No.	Fre-quency	Rated			Max. differential pressure <sup>2)</sup>		Sound pressure level <sup>3)</sup>	Weight Approx.	Order No.
		Voltage <sup>1)</sup>	Current	Power	Vacuum	Pressure			
Hz		V	A	HP					
	50	200-240 Δ / 345-415 Y	9.7 Δ / 5.6 Y	3.0	-136	145	65	82	2BH7610-0AH16-8
1	60	220-275 Δ / 380-480 Y	10.0 Δ / 5.8 Y	3.4	-145	120	71		
2	50	200-240 Δ / 345-415 Y	13.0 Δ / 7.5 Y	4.4	-136	169	65	108	2BH7610-0AH36-8
	60	220-275 Δ / 380-480 Y	13.8 Δ / 8 Y	5.1	-149	193	71		
3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	500 Δ	4.5 Δ	3.0	-136	145	65	82	2BH7610-0AC15-8
	60	575 Δ	4.6 Δ	3.4	-145	120	71		
2	50	500 Δ	5.4 Δ	4.4	-136	169	65	108	2BH7610-0AC35-8
	60	575 Δ	5.4 Δ	5.1	-149	193	71		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 460 V.  
 2) Relief valves available for limiting differential pressure.  
 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).

All G-BH match the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 / -30 (IEC 60034) and thermal class F.

For three phase motors tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/- 5% tolerance.

The frequency tolerance is +/- 2 % maximum.

### Motors for other mains

Voltage range			Fixed voltage						
50 Hz	60 Hz	87 Hz	50 Hz	60 Hz	60 Hz		Δ	Y	2BH7610-0. □ . □
3~									
185 - 220 V Δ / 320 - 380 V Y 200 - 240 V Δ / 345 - 415 V Y 345 - 415 V Δ / 600 - 720 V Y 500 V Y 500 V Δ	200 - 254 V Δ / 345 - 440 V Y 220 - 275 V Δ / 380 - 480 V Y 380 - 480 V Δ / 660 - 720 V Y 575 V Y 575 V Δ	380 V Δ 400 V Δ				• •	• •	H H	1 6
						• •	• •	H H	7 3
						• •	• •	C C	5
3~			IE2 3~ <sup>5)</sup>						
180 - 240 V Δ / 310 - 415 V Y 450 - 550 V Y 450 - 550 V Δ 200 - 260 V Δ / 350 - 450 V Y 350 - 450 V Δ / 610 - 725 V Y	200 - 275 V Δ / 345 - 480 V Y 520 - 600 V Y 520 - 600 V Δ 230 - 290 V Δ / 400 - 500 V Y 400 - 500 V Δ / 690 - 725 V Y	345 V Δ 440 V Δ	200 V Δ / 345 V Y 500 V Y 500 V Δ 230 V Δ / 400 V Y 400 V Δ / 690 V Y	230 V Δ / 400 V Y 575 V Y 575 V Δ 265 V Δ / 460 V Y 460 V Δ	230 V Δ / 400 V Y 575 V Y 575 V Δ 265 V Δ / 460 V Y 460 V Δ	• •	• •	P P	1 3
						• •	• •	P P	5 6
						• •	• •	P P	7

- 5) Performance can differ if IE2 motors are used. Please refer to corresponding data sheets.

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.



Elmo Rietschle is a brand of Gardner Denver's Industrial Products Group and part of Blower Operations

er.de@gardnerdenver.com  
www.gd-elmorietschle.com

Gardner Denver Deutschland GmbH

Industriestraße 26  
97616 Bad Neustadt - Germany

Tel.: +49 9771 6888-0  
Fax: +49 9771 6888-4000

Gardner Denver Schopfheim GmbH

Roggengbachstraße 58  
79650 Schopfheim - Germany

Tel.: +49 7622 392-0  
Fax: +49 7622 392-300