
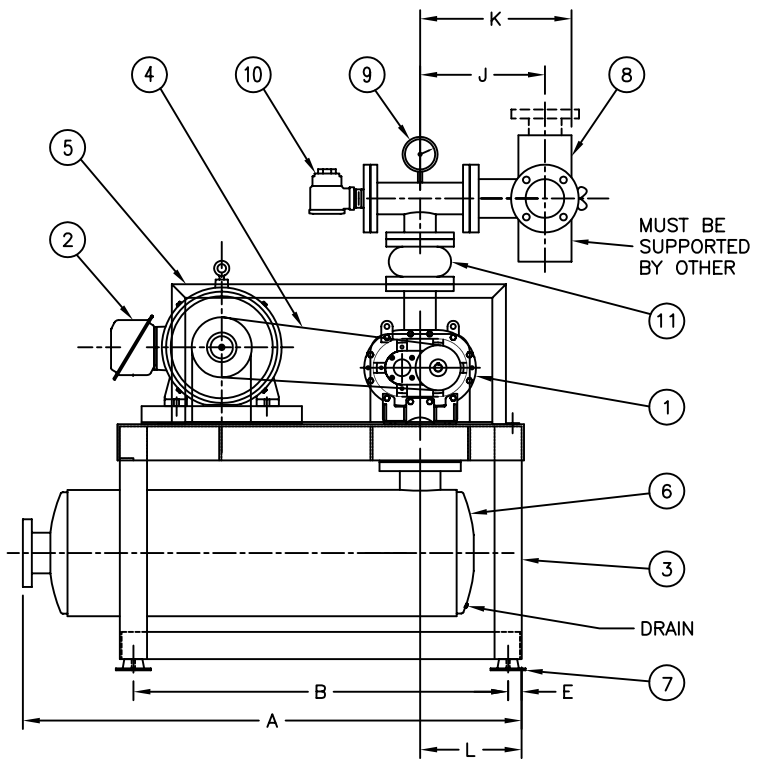


ITEM	Qty.	DESCRIPTION	ITEM	Qty.	DESCRIPTION
1	1	BLOWER, SUTORBILT MODEL ...	7	4	VIBRATION ISOLATORS
2	1	ELECTRIC MOTOR, ...	8	1	INLET FILTER
3	1	COMMON BASE	9	1	PRESSURE GAUGE
4	1	BELT DRIVE	10	1	VACUUM RELIEF VALVE
5	1	BELT GUARD PER OSHA STANDARD	11	1	FLEXIBLE CONNECTOR
6	1	DISCHARGE SILENCER (URB OR RD TYPE)			

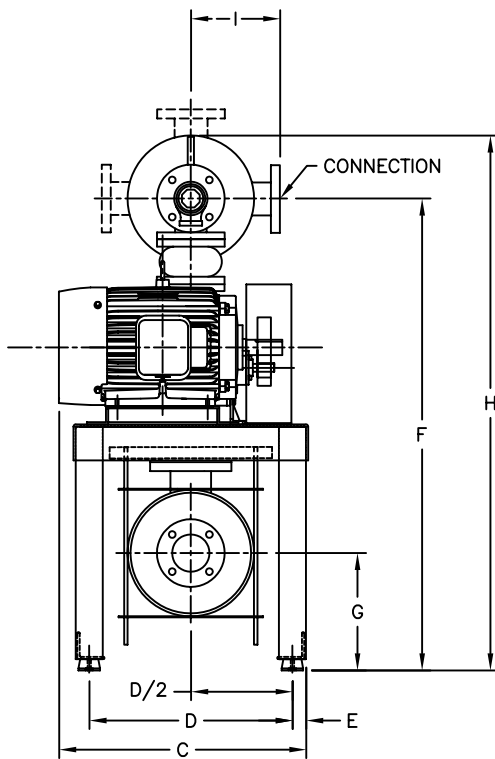

GD GARDNER DENVER
AIRCOM

MODEL	CONNECTION		MOTORS (HP)	A	B	C	D	E	F	G	H	I	J	K	L	Weight
2M-AV200	2	S	3-7.5	43	28.5	18.5	14.5	1.5	42.5	8	47	4.5	8.5	13.5	9	280
2L-AV200	2	S	3-7.5	44	28.5	20	14.5	1.5	37.5	8.5	41.5	4.5	8.5	13.5	9	350
2L-AV200	2.5	S	3-7.5	45	28.5	21	14.5	1.5	38	8	42.5	5	9.5	14.5	9	390
3H-AV200	2	S	3-10	43.5	28.5	21	14.5	1.5	44.5	9	49	4.5	8.5	13.5	9	410
3M-AV200	2	S	5-10	44	28.5	21	14.5	1.5	39	9	43.5	4.5	8.5	13.5	9	420
3L-AV250	2.5	S	3-10	45	28.5	21	14.5	1.5	39.5	8.5	43.5	5	9.5	14.5	9	440
3L-AV300	3	S	3-10	57	28.5	21	14.5	1.5	40.5	8.5	47	9	13	20	9	450
4H-AV200	2	S	5-10	43.5	28.5	21	14.5	1.5	45.5	10	50	4.5	8.5	13.5	9	440
4M-AV250	2.5	S	7.5-10	45	28.5	21	14.5	1.5	41	9.5	45.5	5	9.5	14.5	9	470
4M-BV250	2.5	S	15-25	52	41.5	26	22.5	1.5	49	16	53.5	5	9.5	14.5	11.5	640
4L-BV300	3	S	7.5-25	60	41.5	28	22.5	1.5	51.5	15.5	58	9	13.5	20.5	11.5	840
4L-BV400	4	F	7.5-25	55.5	41.5	30.5	22.5	1.5	51	12.5	58	10	13.5	16.5	11.5	880
5H-BV250	2.5	S	7.5-30	52	41.5	30.5	22.5	1.5	51	15.5	55.5	5	9.5	14.5	11.5	880
5M-BV400	4	F	15-30	55.5	41.5	30.5	22.5	1.5	51	14	58	10	13.5	16.5	11.5	960
5L-BV400	4	F	7.5-30	55.5	41.5	30.5	22.5	1.5	51	14	58	10	13.5	16.5	11.5	1000
5L-BV500	5	F	7.5-30	67	41.5	30.5	22.5	1.5	56.5	12	65.5	12	15	19	11.5	1080
6H-BV300	3	S	10-30	59	41.5	30.5	22.5	1.5	53.5	15.5	60	9	13.5	20.5	11.5	1070
6M-BV500	5	F	15-30	67	41.5	30.5	22.5	1.5	59	15.5	68	12	15	19	11.5	1230
6M-CV500	5	F	40-50	67.5	43.5	33.5	27.5	2	64	18	73	12	15	19	12	1530
6L-CV600	6	F	25-50	73	43.5	33.5	27.5	2	61.5	14	70.5	12	20	28.5	12	1710
7H-CV400	4	F	25-50	56	43.5	33.5	27.5	2	63.5	17.5	70.5	10	13.5	16.5	12	1550
7M-CV600	6	F	30-50	73	43.5	33.5	27.5	2	65	15.5	74	12	20	28.5	12	1820
7M-DV600	6	F	60-75	77	52.5	39	31.5	2.5	71.5	21.5	80.5	12	20	28.5	16	2110
7L-DV800	8	F	40-75	100.5	52.5	39	31.5	2.5	73.5	17.5	85.5	15	18.5	23	16	2510
8M-DV800	8	F	40-75	100.5	52.5	39	31.5	2.5	76.5	17.5	88.5	15	18.5	23	16	2710

NOTES:

- DIMENSIONS AND WEIGHTS ARE NOT CERTIFIED
- DIMENSIONS ARE IN INCHES AND WEIGHTS IN POUNDS
- WEIGHTS ARE APPROXIMATE
- S= THREADED CONNECTIONS STD. NPT F= FLANGED CONNECTIONS
- PACKAGE DIMENSIONS WITH SCREWED CONNECTIONS ARE APPROXIMATE TO 1/2"
- URB TYPE SILENCER : LOW FREQUENCY ATTENUATION
RD TYPE SILENCER : HIGH FREQUENCY ATTENUATION



AIRCOM
TECHNOLOGIES
Inc.

514-695-4740

F: 514-695-0581

www.aircom.ca

SUTORBILT BLOWER PACKAGE - VACUUM - DIMENSIONAL DRAWING

0471-E

05/09/2007

P. 1 OF 1

4

DWG NO.:

DATE:

REV.

THIS DRAWING & ALL INFORMATION THERE ON IS THE PROPRIETY OF AIRCOM TECHNOLOGIES INC. & IS CONSIDERED CONFIDENTIAL.