
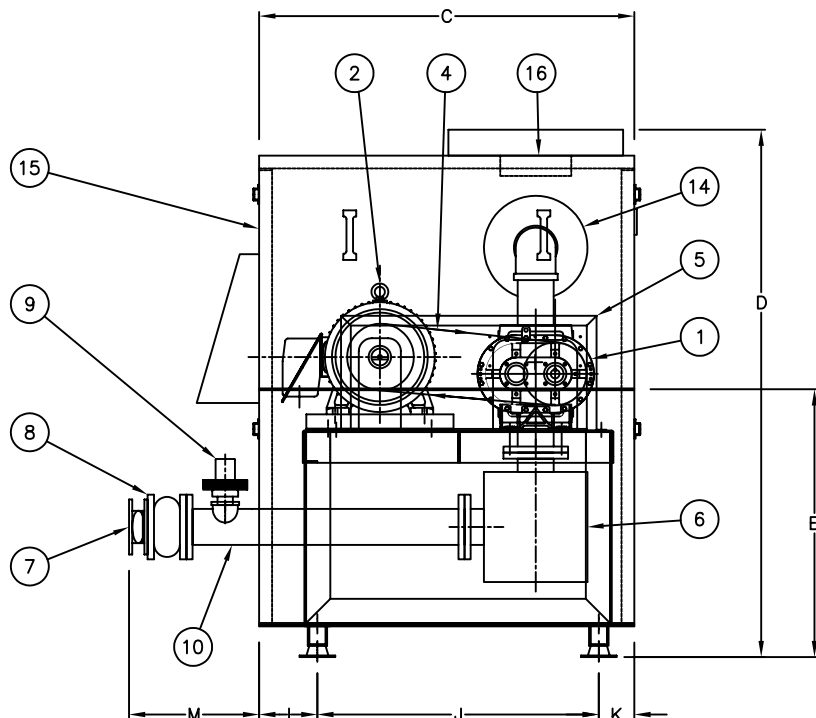


ITEM	Qty.	DESCRIPTION	ITEM	Qty.	DESCRIPTION
1	1	BLOWER, SUTORBILT MODEL ...	9	1	PRESSURE RELIEF VALVE, WEIGHT LOADED
2	1	ELECTRIC MOTOR, ...	10	1	STUB PIPE TO SUPPORT PRESSURE RELIEF VALVE
3	1	COMMON BASE	11	4	VIBRATION ISOLATORS
4	1	BELT DRIVE	12	1	PRESSURE GAUGE WITH ISOLATING VALVE (NOT SHOWN) *
5	1	BELT GUARD PER OSHA STANDARD	13	1	FILTER PRESSURE DROP INDICATOR
6	1	DISCHARGE SILENCER	14	1	INLET FILTER/SILENCER
7	1	CHECK VALVE, TWIN FLAPPER, SPRINGLESS *	15	1	ACCOUSTICAL ENCLOSURE
8	1	FLEXIBLE CONNECTOR *	16	1	AIR CIRCULATION FAN (IF NEEDED)

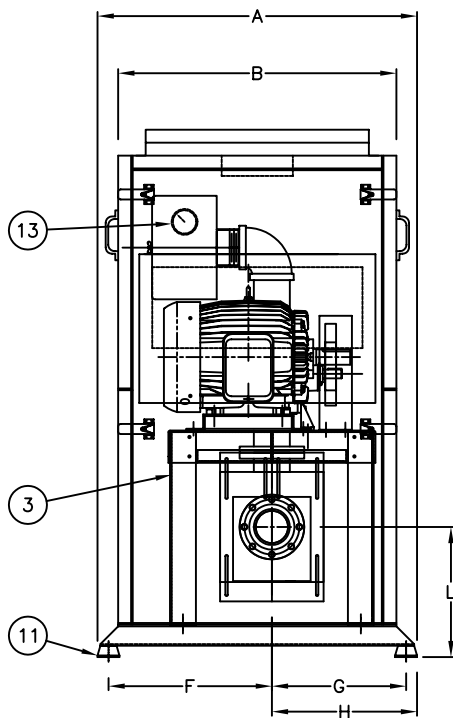

MODEL	CONNECTION		MOTORS (HP)	ENCLOSURE MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	Weight
2M-AP200	2	S	3-7.5	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	11	14.5	610
2L-AP200	2	S	3-7.5	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	11	14.5	680
2L-AP250	2.5	S	3-7.5	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	10	16.5	720
3H-AP200	2	S	3-10	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	11.5	14.5	740
3M-AP200	2	S	5-10	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	12	14.5	750
3L-AP250	2.5	S	3-10	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	10.5	16.5	770
3L-AP300	3	S	3-10	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	9	16	780
4H-AP200	2	S	5-10	CL-100	34.5	30.5	40	50	25	19.5	12.5	13.5	7.5	28.5	4	12.5	14.5	770
4M-AP250	2.5	S	7.5-10	CL-100	34.5	30.5	DIMENSIONS FOR REFERENCE ONLY							28.5	4	11.5	16.5	800
4M-BP250	2.5	S	15-25	CL-200	43	38								50	66	33	24	16.5
4L-BP300	3	S	7.5-25	CL-200	43	38	50	66	33	24	16.5	17.75	4.75	41.5	3.75	15	15.5	1380
4L-BP400	4	F	7.5-25	CL-200	43	38	50	66	33	24	16.5	17.75	4.75	41.5	3.75	21.5	16	1420
5H-BP250	2.5	S	7.5-30	CL-200	43	38	50	66	33	24	16.5	17.75	4.75	41.5	3.75	16.5	16	1420
5M-BP400	4	F	15-30	CL-200	43	38	50	66	33	24	16.5	17.75	4.75	41.5	3.75	21.5	15	1510
5L-BP400	4	F	7.5-30	CL-200	43	38	50	66	33	24	16.5	17.75	4.75	41.5	3.75	21.5	15	1540
5L-BP500	5	F	7.5-30	CL-300	61.5	54	56	80	41	32.25	22.75	24.5	7.25	41.5	7.25	25	11	1930
6H-BP300	3	S	10-30	CL-200	43	38	50	66	33	24	16.5	17.75	4.75	41.5	3.75	15	20	1620
CIB100	5	F	15-30	CL-300	61.5	54	56	80	41	35.25	22.75	24.5	7.25	41.5	7.25	25	18.5	2090
CIC100	5	F	40-50	CL-300	61.5	54	56	80	41	35.25	22.75	24.5	7.75	43.5	4.75	24.5	22.75	2390
	6	F	25-50	CL-300	61.5	54	56	80	41	35.25	22.75	24.5	7.75	43.5	4.75	25	22.5	2570
	4	F	25-50	CL-300	61.5	54	56	80	41	35.25	22.75	24.5	7.75	43.5	4.75	22.5	20.5	2430
	6	F	30-50	CL-300	61.5	54	56	80	41	35.25	22.75	24.5	7.75	43.5	4.75	25	23.75	2680

NOTES:

- DIMENSIONS AND WEIGHTS ARE NOT CERTIFIED
- DIMENSIONS ARE IN INCHES AND WEIGHTS IN POUNDS
- WEIGHTS ARE APPROXIMATE AND BASED ON STEEL ENCLOSURES
- S= SCREWED CONNECTIONS F= FLANGED CONNECTIONS
- PACKAGE DIMENSIONS WITH SCREWED CONNECTIONS ARE APPROXIMATE TO 1/2"
- ITEMS IDENTIFIED BY AN ASTERIX (*) ARE SHIPPED LOOSE



514-695-4740

F: 514-695-0581

www.aircom.ca

SUTORBILT BLOWER PACKAGE WITH ACCOUSTICAL ENCLOSURE - PRESSURE - DIMENSIONAL DRAWING

0536-E

05/09/2007

P. 1 OF 1

0

DWG NO.: DATE: REV. THIS DRAWING & ALL INFORMATION THERE ON IS THE PROPRIETY OF AIRCOM TECHNOLOGIES INC. & IS CONSIDERED CONFIDENTIAL