
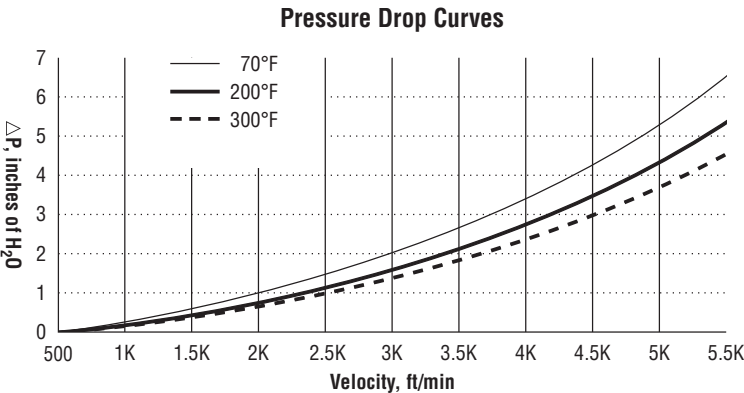
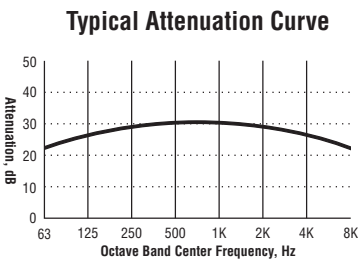


This extremely compact blower silencer works as either an inlet or discharge silencer on rotary positive blowers. It is about one-third the size of a standard silencer, and reduces overall package size, cost, weight and storage space. The unit's internal pack material is suitable for temperatures up to 325

degrees. The unit is operable in conditions up to 15 psig. Flanged or threaded connections are available. Exterior surfaces receive a shop coat of rust inhibitive primer.

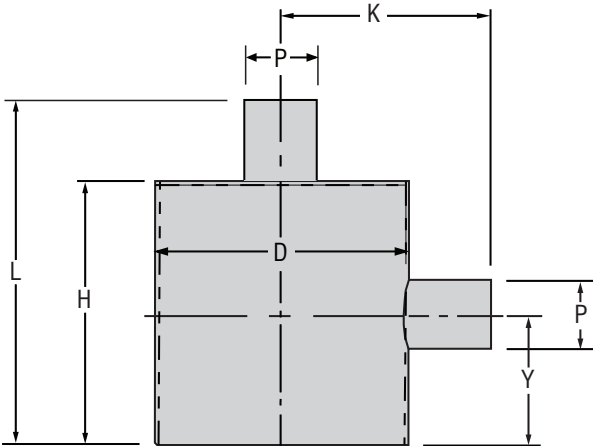

Compact Blower Silencers

Model	Part Number	P (nom.)	D	L	H	Y	K	Weight	CFM CAP
CB-2	56-702-AA	2	8	11	8	4	7	15	120
CB-2½	56-725-AA	2½	8	12½	9½	4¾	7	25	187
CB-3	56-703-AA	3	12	13½	10½	5¼	9	35	270
CB-4	56-704-AA	4	12	18	15	7½	9	45	480
CB-5	56-705-AA	5	16	20	17	8½	11	70	750
CB-6	56-706-AA	6	16	26	23	11½	11	85	1,080
CB-8	56-708-AA	8	24	31	27½	13¾	15½	170	1,920
CB-10	56-710-AA	10	30	39	35½	17¾	18½	275	3,000
CB-12	56-712-AA	12	34	43	39½	19¾	20½	355	4,320