




G-BH2

Data sheet 2BH2 0540-1

Side channel blower with IE2-motors

IE2


CEC US



Performance curves

Vacuum operation (acfm)

Pressure operation (scfm)

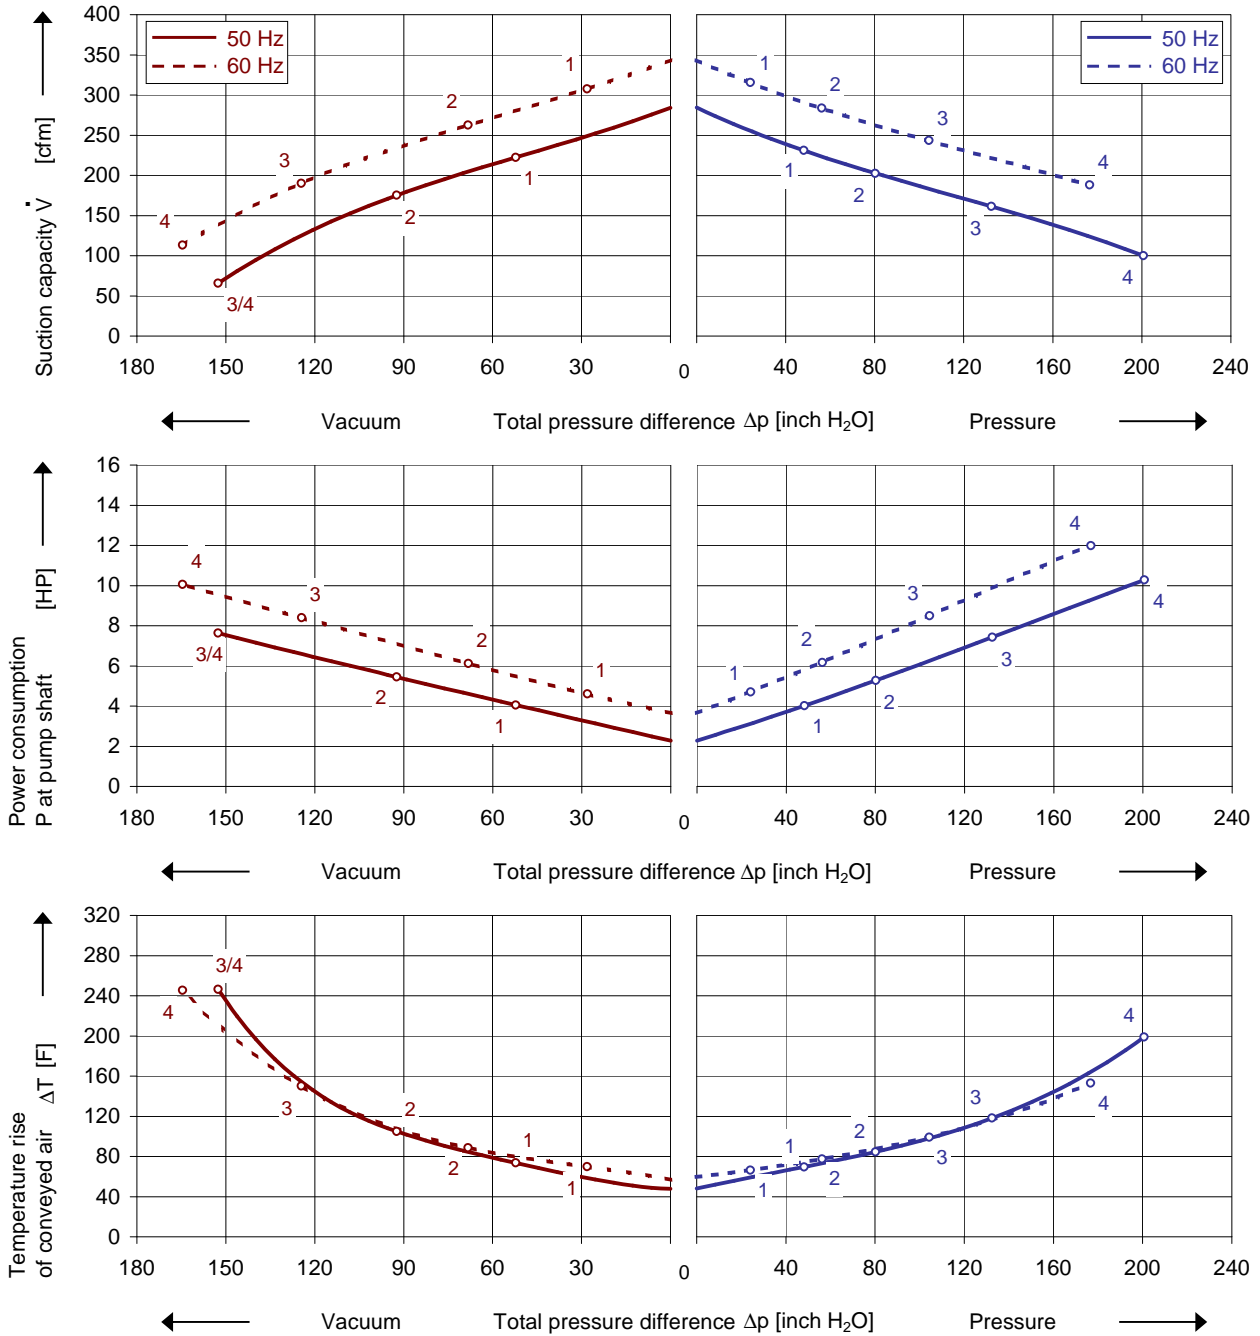

The performance curves are based on air at a temperature of 59 F and an atmospheric pressure of 29.92 inch Hg with a tolerance of $\pm 10\%$. The total Suction capacity relates to inlet conditions. Pressure capacity relates to atmospheric conditions. For other conditions please contact Elmo Rietschle.

Every G-BH blower can be used either for vacuum or pressure in continuous operation over the total performance curve range. The standard motors have a protection category of IP 55 and insulation class F. These blowers are UL and CSA approved.

Selection and ordering data

Type 2BH2 0540-1

No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pressure level ³⁾	Weight Approx.	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure			
		Hz	V	A	HP			dB(A)	
IE2 3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	200 Δ / 345 Y	11.6 Δ / 6.7 Y	4.0	-52	48	69	163	2BH20540-1AAPK1-AA
	60	230 Δ / 400 Y	11.2 Δ / 6.5 Y	4.63	-28	24	73		
2	50	200 Δ / 345 Y	15.1 Δ / 8.8 Y	5.4	-92	80	69	187	2BH20540-1AAPL1-AA
	60	230 Δ / 400 Y	14.7 Δ / 8.4 Y	6.10	-68	56	73		
3	50	200 Δ / 345 Y	20.5 Δ / 11.8 Y	7.4	-153	132	69	212	2BH20540-1AAPM1-AA
	60	230 Δ / 400 Y	19.9 Δ / 11.4 Y	8.4	-124	104	73		
4	50	200 Δ / 345 Y	26.5 Δ / 15.5 Y	10.1	-153	201	71	229	2BH20540-1AAPN1-AA
	60	230 Δ / 400 Y	26.0 Δ / 15.1 Y	11.5	-165	177	75		
IE2 3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)									
1	50	500 Δ	4.7 Δ	4.0	-52	48	69	163	2BH20540-1AAPK5-AA
	60	575 Δ	4.5 Δ	4.63	-28	24	73		
2	50	500 Δ	6.0 Δ	5.4	-92	80	69	187	2BH20540-1AAPL5-AA
	60	575 Δ	5.9 Δ	6.10	-68	56	73		
3	50	500 Δ	8.1 Δ	7.4	-153	132	69	212	2BH20540-1AAPM5-AA
	60	575 Δ	7.9 Δ	8.4	-124	104	73		
4	50	500 Δ	10.7 Δ	10.1	-153	201	71	229	2BH20540-1AAPN5-AA
	60	575 Δ	10.5 Δ	11.5	-165	177	75		

1) In case of variable frequency drive operation the standard motor insulation system is suitable for VFD input voltages up to 460 V.

2) Relief valves available for limiting differential pressure.

3) Surface sound pressure levels are according to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).


All G-BH blowers conform to the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 / -30 (IEC 60034) and thermal class F.

For three phase motors tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/- 5% tolerance.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages

Voltage range		Fixed voltage		VFD			
50 Hz	60 Hz	50 Hz	60 Hz	87 Hz	60 Hz	2BH20540-1AA □ . □ -AA	
					Δ	Y	
3~		IE2 3~					
180 - 240 V Δ / 310 - 415 V Y 450 - 550 V Y	200 - 275 V Δ / 345 - 480 V Y 520 - 600 V Y	200 V Δ / 345 V Y 500 V Y	230 V Δ / 400 V Y 575 V Y		•	•	P 1
450 - 550 V Δ	520 - 600 V Δ	500 V Δ	575 V Δ		•	•	P 3
200 - 260 V Δ / 350 - 450 V Y	230 - 290 V Δ / 400 - 500 V Y	230 V Δ / 400 V Y	265 V Δ / 460 V Y	400 V Δ	•	•	P 5
350 - 450 V Δ / 610 - 725 V Y	400 - 500 V Δ / 690 - 725 V Y	400 V Δ / 690 V Y	460 V Δ		•	•	P 6
							P 7

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

Elmo Rietschle is a brand of Gardner Denver

**Gardner
Denver**

Your Ultimate Source for Vacuum and Pressure

Gardner Denver Deutschland GmbH

Industriestraße 26
97616 Bad Neustadt - Germany
Tel.: +49 9771 6888-0
Fax: +49 9771 6888-4000

www.gd-elmorietschle.com • er.de@gardnerdenver.com

Gardner Denver, Inc.

1800 Gardner Expressway
Quincy, IL 62305
Tel: 217-222-5400
Fax: 217-221-8780