


ITEM	Qty.	DESCRIPTION	ITEM	Qty.	DESCRIPTION
1	1	BLOWER, HELIFLOW MODEL ...	9	1	PRESSURE RELIEF VALVE, WEIGHT LOADED
2	1	ELECTRIC MOTOR, ...	10	1	STUB PIPE TO SUPPORT PRESSURE RELIEF VALVE
3	1	COMMON BASE	11	4	VIBRATION ISOLATORS
4	1	BELT DRIVE	12	1	PRESSURE GAUGE WITH ISOLATING VALVE (NOT SHOWN, SHIPPED LOOSE)
5	1	BELT GUARD PER OSHA STANDARD	13	1	FILTER PRESSURE DROP INDICATOR
6	1	DISCHARGE SILENCER (URB OR RD TYPE)	14	1	INLET FILTER/SILENCER
7	1	CHECK VALVE, TWIN FLAPPER, SPRINGLESS	15	1	INLET SILENCER (URB TYPE)
8	1	FLEXIBLE CONNECTOR			

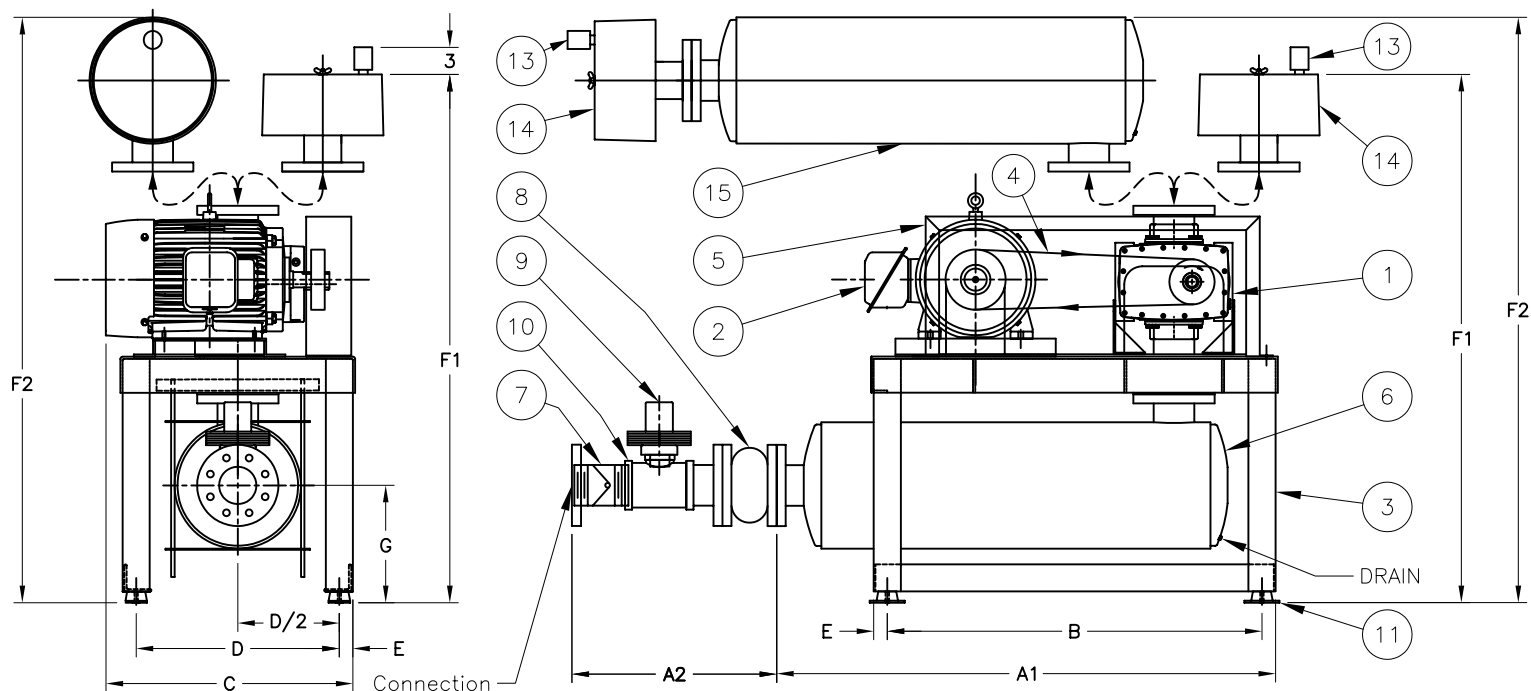

MODEL	CONNECTION	MOTORS (HP)	A1		A2	B	C	D	E	F1		F2		G		Weight	
			URB	RD						URB	RD	URB	RD	URB	RD	Config. 1	Config. 2
HF-406	3	S	7.5-40	60	17	41.5	29.5	22.5	1.5	54		64		15		850	890
HF-406	4	F	7.5-40	55.5	53.5	23.5	41.5	29.5	22.5	1.5	64.5	69.5	74	12	11.5	890	970
HF-408	4	F	7.5-50	55.5	53.5	23.5	41.5	30.5	22.5	1.5	62.5	68	72.5	13.5	13	1160	1240

NOTES:

- DIMENSIONS AND WEIGHTS ARE NOT CERTIFIED
- DIMENSIONS ARE IN INCHES AND WEIGHTS IN POUNDS
- WEIGHTS ARE APPROXIMATE
- S= THREADED CONNECTIONS STD. NPT. F= FLANGED CONNECTIONS
- PACKAGE DIMENSIONS WITH SCREWED CONNECTIONS ARE APPROXIMATE TO 1/2"
- CONFIGURATION 1 : INLET FILTER ONLY
CONFIGURATION 2 : INLET FILTER AND SILENCER
- URB TYPE SILENCER : LOW FREQUENCY ATTENUATION
RD TYPE SILENCER : HIGH FREQUENCY ATTENUATION



514-695-4740

F: 514-695-0581

www.aircom.ca

HELIFLOW BLOWER PACKAGE - PRESSURE - DIMENSIONAL DRAWING

0615-E

01/13/06

P. 1 DE 1

1

DWG NO.:

DATE:

REV.

THIS DRAWING & ALL INFORMATION THERE ON IS THE PROPRIETY OF AIRCOM TECHNOLOGIES INC. & IS CONSIDERED CONFIDENTIAL